

Bubble Down Mat


The Bubble Down Series is the ultimate mat for dry environments where a worker's task requires pivoting. Anti-static properties help dissipate the build up of static electricity. Perfect for assembly and pick lines. Available in 2 profiles: Bubble Down and XL Bubble Down.



BUBBLE DOWN



XL BUBBLE DOWN



ERGONOMIC




BEVELED EDGE



ANTI-STATIC



ALLOWS PIVOTING

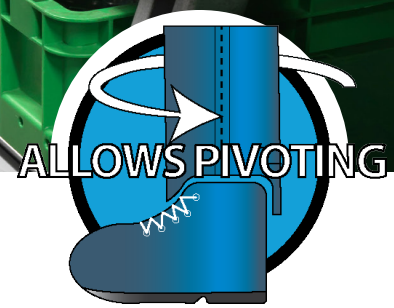

2 Profiles

Bubble Down



Thickness .62" (1.5 cm)
Yellow Bevel Length: 2" (5 cm)

XL Bubble Down



Thickness 1" (2.5 cm)
Yellow Bevel Length: 3.5" (9 cm)

BENEFITS

ERGONOMIC : Designed to stimulate circulation in feet, legs and lower back. Circulation is stimulated by the unique, patented profile of the mat, which forces muscular response.

BEVELED EDGES : Yellow bevels are required on these mats. Bevels will never curl up, eliminating trip hazards.

ANTI-STATIC : Ideal for environments requiring static control.

ALLOWS PIVOTING : Smooth top surface makes Bubble Down mats the ultimate mat for when there is frequent pivoting.

SILICON FREE: All mats are silicon free.

TRUE WARRANTY: We stand 100% behind our products with full replacement coverage if our product fails to perform as promoted within that period. We call this a *True Warranty*.

ANY SIZE ANY SHAPE: Can be custom made in any size and shape, creating one continuous surface, eliminating seams and trip hazards.

Bubble Down

	BUBBLE DOWN	BUBBLE DOWN XL
Material.....	Foamed Polyurethane	
Color	Grey w/ yellow bevels	
Weight.....	2500 g +/- 50 g // 5.5 lbs +/- 0.1 lbs	3900 g +/- 50 g // 8.6 lbs +/- 0.1 lbs
Length without beveled edges..	91 cm +/- 1% // 35.8" +/- 0.38"	
Width without beveled edges...	60 cm +/- 1% // 23.6" +/- 0.38"	
Thickness	15 mm // 0.62"	25 mm // 1"
Density.....	380 kg/m ³ +/- 10 % ISO 2781	
Hardness	22-30 Sh A Sh A DIN 53505	
Abrasion Load = 5 N	180 mm ³ // 7 in ³ ISO 46 49 (5 N)	
Electrical Resistance Surface point to point % 50 RH.....	1x10 ⁹ Ω-5x10 ⁹ Ω IEC-61340 4-1/ ESD STM7.1-2001	
Breaking Point/Tensile Strength..	2 Mpa EN ISO 527-1	
Elongation at Break.....	500% EN ISO 527-1	
Tearing Strength	1,5 N/mm ASTM D 624	
Thermal Properties		
Minimum use.....	0°C // 32°F	
Maximum use.....	32°C // 90°F	
Maximum short duration	40°C // 115°F	
UV-Resistance	Inferior	
Hydrolic Resistance	Inferior	
Warranty	Bubble Down: 4 years, XL Bubble Down: 5 years	